

CEILING CONCEALED TYPE

# PEFY-VML

Increased design flexibility for hotel and residential use from an ultra low height body.



Low static pressure (0.02"water) meets an application requiring direct air flow

Changeable air flow rate (3 stage low-middle-high)


Flexible installation by rear or bottom return air inlet.

Filter is attached as standard.

## Ultra low height unit with 8.86" high

Can be installed easily in tight spaces, such as ceiling cavities or drop-ceilings.

Notes: Drain lift-up pump not applicable.

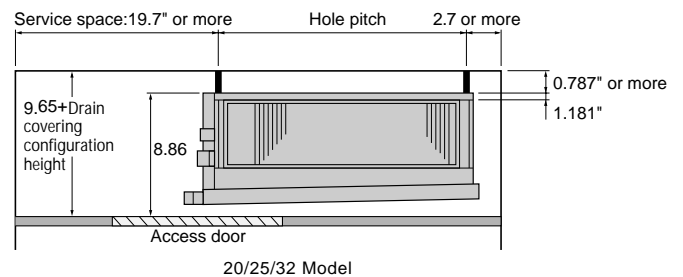

## Reduced noise thanks to the use of newly designed centrifugal fan


Noise level table (Standard static pressure 220V)

Noise Level	Capacity				dB(A)
	Fan Speed	P20	P25	P32	
	High	36	36	40	
	Mid	33	33	35	
	Low	29	29	32	

Note: In the case of bottom inlet, the operating noise is louder than in the case of rear inlet.

## Drainage lines may be connected on either the right or left side.

Perfect for use in hotels and other places where line placement is a problem.



CEILING CONCEALED TYPE


# PEFY-VMH

Increased design flexibility from sufficient external static pressure allow authentic duct air-conditioning with an elegant interior layout.



## One-side maintenance

All maintenance to the unit, including fan inspection and fan motor removal, can be conducted from the inspection opening on one side.




## Max. external static pressure 0.803"water Drain up mechanism (option) ensures up to 21.65" of lift

The additional external static pressure capacity provides flexibility for duct extension, branching and air outlet configuration.

		P40	P50	P63	P71	P80	P100	P125	P140	P200	P250
External static pressure "water)	220V	0.201 / 0.401 / 0.803									

The introduction of an upper drain mechanism allows the drain connection to be raised as high as 21,654", allowing more freedom in piping layout design and reducing horizontal piping requirements.

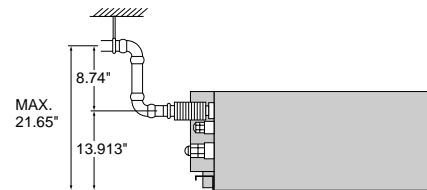

## Reduced noise thanks to the use of newly designed centrifugal fan

Noise Level	Capacity		P40	P50	P63	P71	P80	P100	P125	P140
	Fan Speed	High	34	34	38	39	41	42	42	42
	Low	27	27	32	32	35	34	34	34	34

Duct can be connected to intake side. Suction chamber is included as standard